



36-1


### Features

- For two switch positions
- With a lock in both end positions
- For cable size M, travel 60 mm

Variable application due to costumers specifiable gate plate. The input lever is locked via the gate plate.

Travel standard version:  
60 mm, at console  $s = 4$  mm

Can be used e.g. for gear switching on asphalt road finishers or flap adjustment in the aviation sector. In particular safety requirements are fulfilled for the locking of the end positions.

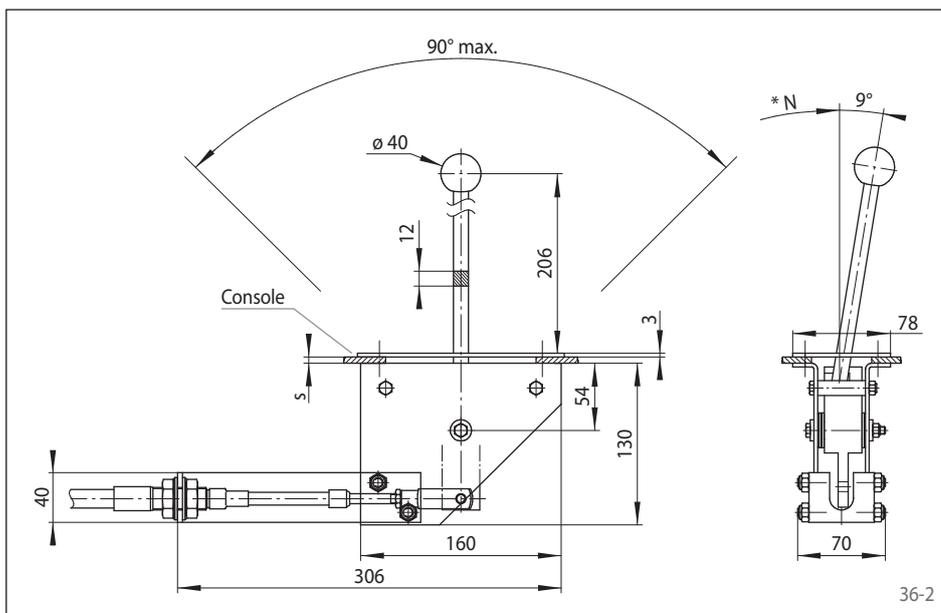


36-2

Cable series:	775/275/283
Cable size:	M
Connection:	T
Travel code:	3
F max.:	950 N
Lever transmission:	1:4,8
Section in console for standard splitter:	120 x 30 mm
Art.-No.:	4564-010039

Robust steel sheet construction, zinc-coated.  
Large dimensioned bearing positions, maintenance-free, for long service life and high operating safety.

\* Hand lever springs against N.

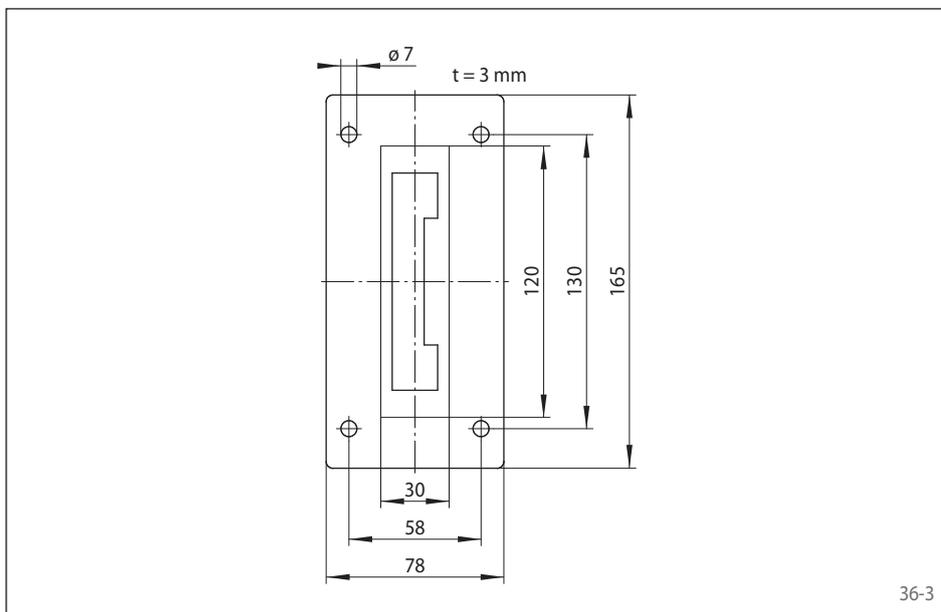

36-3